



PolyKeg[®] PRO
logistics data sheets



PolyKeg® PRO logistics data sheets

EMPTY KEGS PALLETIZATION

PALLET 80X120 CM | 31.50"X47.24"

| Palletization | | | | | | |
|----------------------------|---------------|------------------|------------------|------------------|------------------|------------------|
| | | 12 L | 16 L | 20 L | 24 L | 30 L |
| | | 406 oz. | 541 oz. | 676 oz. | 811 oz. | 1014 oz. |
| Layers | | 5 | 4 | 4 | 4 | 4 |
| Kegs per layer | | 15 | 15 | 15 | 12 | 11 |
| Kegs per pallet | | 75 | 60 | 60 | 48 | 44 |
| Height | | 2077 mm 81,77" | 2044 mm 51,91" | 2396 mm 94,33" | 2384 mm 93,85" | 2384 mm 93,85" |
| QUANTITY | pallet | kegs | kegs | kegs | kegs | kegs |
| CTR 20 ft Standard | 11 | 825 | 660 | 495* | 396* | 363* |
| CTR 40 ft High Cube | 24 | 1800 | 1440 | 1440 | 1152 | 1056 |
| CTR 45 ft High Cube | 32 | 2400 | 1920 | 1920 | 1536 | 1408 |
| Truck 13,6 mt | 32 | 2400 | 1920 | 1920 | 1536 | 1408 |

PALLET 100X120 CM | 39.37"X47.24"

| Palletization | | | | | | |
|----------------------------|---------------|------------------|------------------|------------------|------------------|------------------|
| | | 12 L | 16 L | 20 L | 24 L | 30 L |
| | | 406 oz. | 541 oz. | 676 oz. | 811 oz. | 1014 oz. |
| Layers | | 5 | 4 | 4 | 4 | 4 |
| Kegs per layer | | 20 | 20 | 20 | 16 | 12 |
| Kegs per pallet | | 100 | 80 | 80 | 64 | 48 |
| Height | | 2077 mm 81,77" | 2044 mm 51,91" | 2396 mm 94,33" | 2384 mm 93,85" | 2384 mm 93,85" |
| QUANTITY | pallet | kegs | kegs | kegs | kegs | kegs |
| CTR 20 ft Standard | 10 | 1000 | 800 | 600* | 480* | 360* |
| CTR 40 ft High Cube | 22 | 2200 | 1760 | 1760 | 1408 | 1056 |
| CTR 45 ft High Cube | 26 | 2600 | 2080 | 2080 | 1664 | 1248 |
| Truck 13,6 mt | 26 | 2600 | 2080 | 2080 | 1664 | 1248 |

WARNINGS

Any stacking of pallets and the maximum number of layers must take into account the mechanical properties of the keg as reported on the technical data sheet, the local regulations, and the means and manner of handling and transport, as well as the conditions of the storage areas. Kegs are supplied on pallets, wrapped with white extensible film for better protection.

*Quantities refer to three layers palletization, compulsory for CTR 20 ft Standard.




PolyKeg® PRO logistics data sheets



FILLED KEGS PALLETIZATION

PALLET 80X120 CM | 31.50"X47.24"

| Palletization | | | | | |
|------------------------|------------------|------------------|------------------|------------------|------------------|
| | 12 L 406 oz. | 16 L 541 oz. | 20 L 676 oz. | 24 L 811 oz. | 30 L 1014 oz. |
| Layers | 3* | 2* | 2* | 2* | 2* |
| Kegs per layer | 15 | 15 | 15 | 12 | 11 |
| Kegs per pallet | 45 | 30 | 30 | 24 | 22 |
| Height | 1307 mm 51,45" | 1098 mm 43,22" | 1274 mm 50,15" | 1268 mm 49,92" | 1268 mm 49,92" |
| Stacking in storage | | | | | |
| Layers | 3+3 | 2+2 | 2+2 | 2+2 | 2+2 |
| Stacking for transport | | | | | |
| Layers | 3+2 | 2+2 | 2+1 | 2+1 | 2+1 |



Wooden interlayer

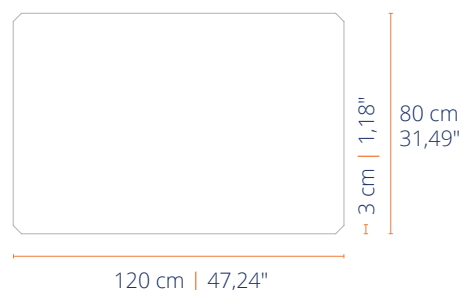

WARNINGS*

Any stacking of pallets and the maximum number of layers must take into account the mechanical properties of the keg as reported on the technical data sheet, the local regulations, and the means and manner of handling and transport, as well as the conditions of the storage areas. When stacking pallets, the load must be evenly distributed by using a rigid interlayer or an overturned pallet between one pallet and another. We recommend wrapping the kegs on pallets with white stretch film for better protection.




PolyKeg® PRO logistics data sheets

FILLED KEGS PALLETIZATION

PALLET 100X120 CM | 39.37"X47.24"

| Palletization | | | | | |
|------------------------|------------------|------------------|------------------|------------------|------------------|
| | 12 L 406 oz. | 16 L 541 oz. | 20 L 676 oz. | 24 L 811 oz. | 30 L 1014 oz. |
| Layers | 3* | 2* | 2* | 2* | 2* |
| Kegs per layer | 20 | 20 | 20 | 16 | 12 |
| Kegs per pallet | 60 | 40 | 40 | 32 | 24 |
| Height | 1307 mm 51,45" | 1098 mm 43,22" | 1274 mm 50,15" | 1268 mm 49,92" | 1268 mm 49,92" |
| Stacking in storage | | | | | |
| Layers | 3+3 | 2+2 | 2+2 | 2+2 | 2+2 |
| Stacking for transport | | | | | |
| Layers | 3+2 | 2+2 | 2+1 | 2+1 | 2+1 |

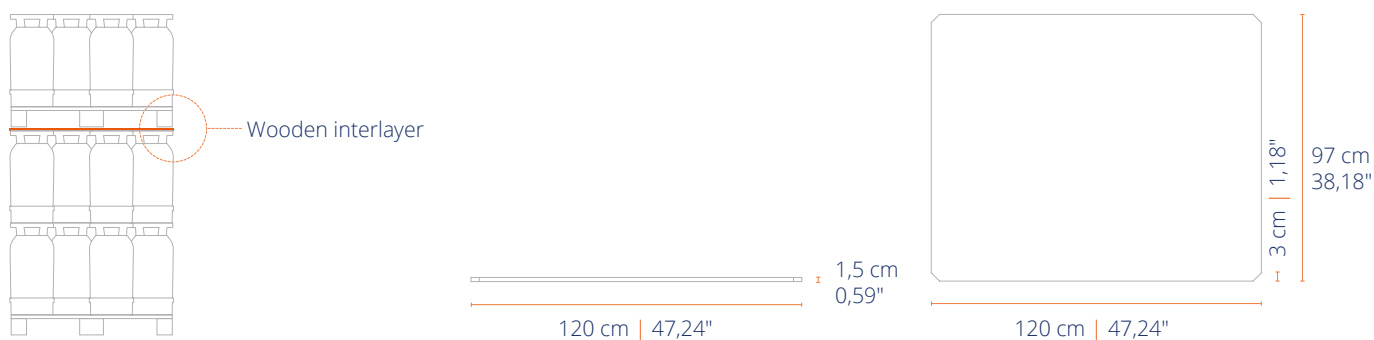

WARNINGS*

Any stacking of pallets and the maximum number of layers must take into account the mechanical properties of the keg as reported on the technical data sheet, the local regulations, and the means and manner of handling and transport, as well as the conditions of the storage areas. When stacking pallets, the load must be evenly distributed by using a rigid interlayer or an overturned pallet between one pallet and another. We recommend wrapping the kegs on pallets with white stretch film for better protection.



PolyKeg® PRO logistics data sheets

LOADING RECOMMENDATIONS

PALLET 80X120 CM | 31.50"X47.24"

| | pallet | plan view |
|----------------------------|--------|-----------|
| CTR 20 ft Standard | 11 | |
| CTR 40 ft High Cube | 24 | |
| CTR 45 ft High Cube | 32 | |
| Truck 13,6 mt | 32 | |

PALLET 100X120 CM | 39.37"X47.24"

| | pallet | plan view |
|----------------------------|--------|-----------|
| CTR 20 ft Standard | 10 | |
| CTR 40 ft High Cube | 22 | |
| CTR 45 ft High Cube | 26 | |
| Truck 13,6 mt | 26 | |

WARNINGS

When transporting filled kegs, it is recommended to use refrigerated containers.

When using refrigerated containers, the number of pallets may vary.

When stacking pallets, the load must be evenly distributed by using a rigid interlayer or an overturned pallet between one pallet and another.

In order to prevent damage to the kegs and/or falls, the pallets must be secured with straps and airbags must be inserted in the empty spaces.

the maximum number of layers must take into account the mechanical properties of the keg as reported on the technical data sheet, the local regulations, and the means and manner of handling and transport, as well as the conditions of the storage areas.